
LSK-0274

APPROVED BY: GBR DRAWN BY: KLY ISSUE DATE: 4/00

BUCK POST

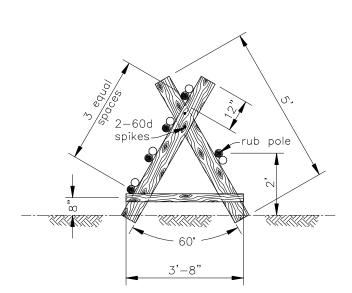


dap joint

approx. 2"

Both buck posts to be notched as shown.

BUCK POST JOINT DETAIL

BUCK AND 4-POLE FENCE

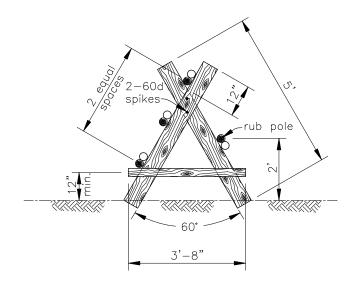

BUCK AND 3-POLE FENCE

- Spikes shall be used as fasteners. Two spikes shall be used fasten poles, braces and buck ties to buck posts.
- Poles, braces and buck posts shall be of material as shown in the specifications.
- 3. Angle of buck should not be less than 60°. Angle should be 80° on untimbered terrain where fence will be subjected to high winds.

Drawing not to scale. Standardized drawing must be adapted to the specific site.

	JOB CLASS	Date
		Designed
	CAD FILE NO.	D
	LSK-0274.DWG	Drawn
	SHEET OF	Checked
U.S.D.A. NATURAL RESOURCES CONSERVAT	ION SERVICE	Approved